HYDRAULIC



MXT[®] Hydraulic Torque Wrench

The MXT is the world's best-selling industrial bolting system with over one hundred thousand in use around the world. Since 1990, the signature blue housing has represented quality, durability, and reliability on job sites in every major industry. From the tallest roller coasters to the world's largest bridges, the MXT has the power to get the job done.

LOCK-UP RELEASE



The MXT was the first tool in the industry to feature a release lever that allows you to release the tool if it locks on the application. (Also found on the AVANTI).

NO-SLIP RATCHET




The MXT pioneered this new system for more powerful breakout and faster tightening. The secondary pawl inside the tool prevents the ratchet from turning opposite of the direction it is being driven.

SPECIAL ALLOY OPTION



The MXT-SA provides the proven reliability of the MXT design with advanced materials used to increase lifespan further for extreme usage. The MXT-SA tools come with a 5-year, no-questions-asked warranty.

HYDRAULIC -

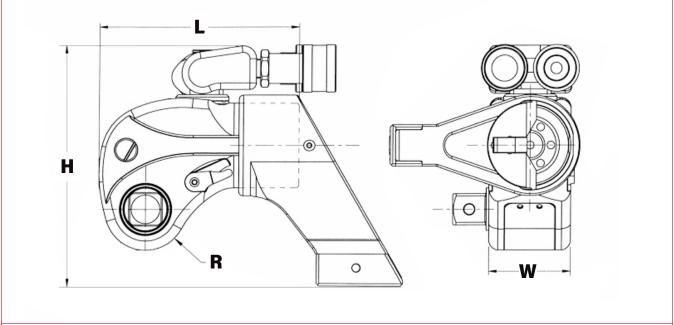

LEGEND: H = HEIGHT W = WIDTH L = LENGTH R = RADIUS

| MODEL NUMBER | н | w | L | R | SQUARE DRIVE | WEIGHT | TORQUE | |
|--------------|-------|------|-------|------|--------------|--------|--------------|--------------|
| IMPERIAL | in. | | | | | lbs. | ft-Ibs (Min) | ft-lbs (Max) |
| MXT7 | 4.25 | 1.62 | 3.96 | 0.81 | 3/4 | 2.69 | 118 | 822 |
| MXT - 1 | 4.90 | 1.97 | 4.88 | 0.98 | 3/4 | 3.95 | 200 | 1,340 |
| MXT - 3 | 6.12 | 2.63 | 6.34 | 1.31 | 1 | 8.29 | 480 | 3,230 |
| MXT - 5 | 7.22 | 3.16 | 7.61 | 1.57 | 1-1/2 | 14.20 | 835 | 5,590 |
| MXT - 10 | 8.80 | 3.95 | 9.51 | 1.96 | 1-1/2 | 24.80 | 1,755 | 11,520 |
| MXT - 15 | 9.67 | 4.38 | 10.55 | 2.18 | 2-1/2 | 36.00 | 2,268 | 15,399 |
| MXT - 20 | 10.24 | 4.73 | 11.41 | 2.36 | 2-1/2 | 43.40 | 2,960 | 19,760 |
| MXT - 35 | 12.42 | 5.82 | 14.03 | 2.90 | 2-1/2 | 77.45 | 5,400 | 37,100 |
| | | | | | | | | |
| METRIC | mm | | | | in. | kg | Nm (Min) | Nm (Max) |
| MXT7 | 108 | 41 | 101 | 21 | 3/4 | 1.22 | 160 | 1114 |
| MXT - 1 | 124 | 50 | 124 | 25 | 3/4 | 1.80 | 271 | 1816 |
| MXT - 3 | 155 | 67 | 161 | 33 | 1 | 3.77 | 650 | 4377 |
| MXT - 5 | 183 | 80 | 193 | 40 | 1-1/2 | 6.45 | 1131 | 7575 |
| MXT - 10 | 224 | 100 | 242 | 50 | 1-1/2 | 11.27 | 2378 | 15610 |
| MXT - 15 | 246 | 111 | 268 | 55 | 2-1/2 | 16.36 | 3073 | 20866 |
| MXT - 20 | 260 | 120 | 290 | 60 | 2-1/2 | 19.73 | 4011 | 26775 |
| MXT - 35 | 315 | 148 | 356 | 74 | 2-1/2 | 35.20 | 7317 | 50271 |

The World's Most Trusted Industrial Bolting Systems

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2021 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.



Headquarters: 333 Route 17 N., Mahwah, NJ 07430 +1-201-512-9500 Email: info@hytorc.com

Phone: 1-800-FOR-HYTORC

01072021-PR-CS-MXT

Online: hytorc.com